

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

REC'D 04 SEP 2003

WIPO

PCT

10 / 525975

PCT/ SE 03 / 01320

28 FEB 2005

Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande Sandvik AB, Sandviken SE
Applicant (s)

(21) Patentansökningsnummer 0202535-1
Patent application number

(86) Ingivningsdatum 2002-08-28
Date of filing

Stockholm, 2003-08-28

För Patent- och registreringsverket
For the Patent- and Registration Office


Gunilla Larsson

Avgift
Fee

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

PATENT- OCH
REGISTRERINGSVERKET
SWEDEN

Postadress/Adress
Box 5055
S-102 42 STOCKHOLM

Telefon/Phone
+46 8 782 25 00
Vx 08-782 25 00

Telex
17978
PATOREG S

Telefax
+46 8 666 02 86
08-666 02 86

BEST AVAILABLE COPY

AWAPATENT AB

Kontor/Handläggare

Växjö/Erik Simonsson/ESN

SANDVIK AB

Ansökningsnr

Vår referens

SE-2023104

1

A CRUSHER AND A METHOD OF CRUSHING MATERIALTechnical Field of the Invention

The present invention relates to a vertical shaft impact crusher for crushing material, said crusher comprising

5 a rotor for accelerating a first flow of material to be crushed,

a first feed means for vertically feeding the first flow of material to the rotor,

10 a housing comprising a wall with a circumferential impact wall section against which the accelerated first flow of material may be crushed,

a second feed means for feeding a second flow of material to be crushed into the path of the accelerated first flow of material.

15 The present invention further relates to a method of crushing material, said method comprising the steps of

feeding a first flow of material to be crushed to a rotor rotating around a vertical axis,

20 in said rotor accelerating said first flow of material towards an impact wall section of a housing surrounding the rotor,

feeding a second flow of material to be crushed into the path of the accelerated first flow of material.

25 Background Art

Vertical shaft impact crushers (VSI-crushers) are used in many applications for crushing hard material like rocks, ore etc. US 3,154,259 describes a VSI-crusher comprising a housing and a horizontal rotor located

30 inside the housing. Material that is to be crushed is fed into the rotor via an opening in the top thereof. With the aid of centrifugal force the rotating rotor ejects the material against the wall of the housing. On impact

with the wall the material is crushed to a desired size. The housing wall could be provided with anvils or have a bed of retained material against which the accelerated material is crushed.

5 To increase the amount of material crushed by the crusher two separate material flows could be fed to the crusher. A first material flow is fed to the rotor. The first material flow is accelerated by the rotor and is ejected towards the housing wall. A second material flow
10 is fed outside the rotor, i.e. between the rotor and the housing. This second material flow is hit by the first material flow ejected by the rotor. Thus the first and second material flows are crushed against each other just outside the rotor.

15 US 2,012,694 to Runyan describes a crusher where a first flow of material is fed to the centre of a rotating rotor. A second flow of material is fed at the wall of a crusher housing via a feeder comprising two spaced cones. At the housing wall the second flow of material is hit by
20 the first flow of material ejected by the rotor.

US 3,429,511 to Budzich describes a crusher where a first flow of material is fed to the centre of a rotating rotor. A second flow of material is fed via a feeding gap extending around the rotor. The second flow of material
25 forms a continuous curtain of flowing material covering the pathway of the first flow of material just outside the rotor. The first flow of material ejected by the rotor thus hits and crushes the second flow of material.

US 4,662,571 to MacDonald describes a crusher where a
30 first flow of material is fed to the centre of a rotating rotor. A second flow of material is fed into the path of the first material flow accelerated by said rotor before said first material impacts against the crusher wall.

The above crushers do not to utilize the energy of
35 the first flow of material in a very efficient way.

Summary of the Invention

It is an object of the present invention to provide a crusher which utilizes the energy of a first flow of material accelerated by a rotor in a more efficient way.

5 This object is achieved by a crusher according to the preamble and characterized in that

the second feed means is adapted to direct the second flow of material in a direction having a substantially tangential component in relation to the rotor, such that the second flow of material will have a substantially tangential component of movement in relation to the rotor when reaching the path of the first flow of material.

15 The present invention thus provides a second flow of material having a substantially tangential component of movement. This improves the crushing action and makes it possible to direct the second flow of material towards positions suitable for impact and away from the periphery of the rotor and the internal structures, such as internal beams of the crusher. The versatility of the crusher is improved resulting in the ability to increase the throughput and to alter the size distribution curve of the crushed product.

25 Preferably the second feed means comprises a circumferential distributing wall section of the inner wall of the housing, the distributing wall section being located above said impact wall section, the second feed means further comprising a feed hopper means for feeding, in a first step, the second flow of material in a direction towards the distributing wall section.

30 The distributing wall section makes it possible to give the second flow of material a desired velocity and the desired direction just before it is to enter the impact wall section.

35 Preferably the feed hopper means comprises an inner hopper and an outer hopper surrounding the inner hopper, said hoppers having a common vertical axis substantially

coinciding with the vertical axis of the rotor, the inner hopper being provided with at least one outlet for allowing the second flow of material fed to the inner hopper to enter a space formed between the inner and the outer hopper, an "L"-shaped direction arm being fixed in the space between said hoppers just outside said outlet to facilitate the building of a hillside of accumulated material, the hillside having a slope being tangential in relation to the rotor for directing the second flow of material towards the distributing wall section.

The inner and outer hopper provides an efficient way of distributing the desired amount of material for forming the second flow of material. The hillside formed on the direction arm provides an efficient base for giving the second flow of material the desired direction without causing wear to internal components including the direction arm itself.

Preferably a horizontal leg of the "L"-shaped direction arm is pointing in the rotational direction of the rotor, such that any dust entrained by the rotor in a direction having an upwardly directed component and a component being tangential in relation to the rotor will be hindered by a vertical leg of the direction arm.

The vertical leg of the direction arm will efficiently decrease the dust emission from the inner hopper. Thus expensive filtering means for filtering emitted air may be omitted. It also becomes much easier to inspect the crusher during operation and to observe the amount of material forming the second flow of material.

Preferably the inner and outer hoppers have a polygonal shape as seen from above. The polygonal shape is preferable since it makes the manufacturing of outlets formed in the inner hopper and in particular hatches for covering said outlets much easier since they all can be made flat. The polygonal shape also assists in reducing dust emissions from the crusher since the

internal corners of the polygonal hoppers will get filled with dust thereby creating dead pockets of retained dust, which help absorbing the air flow created by the rotor. The polygonal shape also helps deflecting the air streams swirling around inside the crusher. The dead pockets of retained dust will also protect the inner and outer hopper from wear.

Preferably the second feed means further comprises the upper surface of a ring fixed to the inner wall of said housing to separate the distributor wall section from the impact wall section. The ring provides a base for the distributing wall section and prevents any material from the impact wall section from bouncing up to the distributing wall section. Also material from the distributing wall section will be prevented from entering the impact wall section in places where it is not desired. The separation of the distributing wall section from the impact wall section thus makes the crushing more efficient and decreases wear on internal parts of the crusher.

Preferably the second feed means further comprises at least one vertical collection plate extending radially with respect to the rotor, the collection plate being fixed to the upper face of the ring at such a location that a part of the second flow of material fed towards the distributing wall section in said first step will accumulate against the collection plate to form a hillside of material, the hillside having a slope being substantially tangential in relation to the rotor for giving, in a second step, the remaining part of the second flow of material a substantially tangential component of movement in relation to the rotor when reaching the path of the first flow of material. The hillside formed will protect the internal parts, including the collection plate and the upper surface of the ring from wear. The hillside will also provide the desired direction for the second flow of material before

the second flow of material enters the impact wall section.

A further object of the present invention is to provide a method of crushing material which improve the utilization of the energy supplied during the crushing.

This object is achieved with a method according to the preamble and characterized in feeding the second flow of material in a direction having a substantially tangential component in relation to the rotor, such that the second flow of material will have a substantially tangential component of movement in relation to the rotor when reaching the path of the first flow of material. The inventive method makes it possible to direct the second flow of material towards positions attractive for impact and away from internal structures such as internal beams of the crusher. Thus crushing action and utilization of crushing energy is improved and wear inside the crusher is reduced.

Preferably the second flow of material is fed into the path of the first flow of material adjacent to the impact wall section. An advantage with this is that the second flow of material will, after being hit by the first flow of material, impact against the impact wall section. Thus the second flow of material will be crushed against the impact wall section and it will also be subjected to further hits of the first flow of material. The retention time of the second flow of material at the impact wall section will thus be increased. This is a large advantage over prior art crushers where a second flow of material randomly falls freely between the rotor and the crusher wall. This random falling of the prior art crushers results in that a major part of a second flow of material will never be hit by the first flow of material. The randomly falling second flow of material of the prior art crushers will also deflect the first flow of material thus reducing or eliminating the crushing against the crusher wall. Another advantage of the

present invention is that the risk that the second flow of material accidentally impacts the rotor is decreased. Also the risk of the first flow of material accidentally rebounding against the rotor or other internal structures after hitting the second flow of material is decreased. Thus the wear on the crusher and in particular on the rotor is decreased.

Preferably the second flow of material is fed from a position adjacent to the axis of the rotor towards a wall of the housing in a direction having a substantial tangential component in relation to the rotor. The central feeding of the material makes it possible to feed in one position and then divide the flow of material into a first flow of material and a second flow of material. The feeding towards the wall increases the chance of placing the second flow of material in a position suitable for best crushing performance. In particular the chance of the second flow of material reaching the path of the first flow of material adjacent to the impact wall is improved.

Brief Description of the Drawings

The invention will hereafter be described in more detail and with reference to the appended drawings.

Fig 1 is three-dimensional section view and shows a rotor for a VSI-crusher

Fig 2 is a three-dimensional view and shows the rotor of fig 1 with the upper disc removed.

Fig 3 shows the view of fig 2 as seen from above in a two dimensional perspective.

Fig 4 is a three dimensional view, partly in section, and shows a vertical shaft impact crusher.

Fig 5 is a section view and shows the crusher of fig 4.

Fig 6 is a schematic section view and shows the build up of a bed of retained material against an impact wall section.

Fig 7 is a section view taken along the line VII-VII of fig 5.

Fig 8 is a three dimensional view, partly in section, and shows the pathway of the second flow of material of the vertical shaft impact crusher.

Fig 9 is a top view, partly in section, and shows the pathway of the second flow of material of the vertical shaft impact crusher.

Fig 10 is a side view showing a direction arm in detail.

Detailed Description of Preferred Embodiments of the Invention

Fig 1 shows a rotor 1 for use in a VSI-crusher. The rotor 1 has a roof in the form of an upper disc 2 having a top wear plate 3 and a floor in the form of a lower disc 4. The lower disc 4 has a hub 6, which is welded to the disc 4. The hub 6 is to be connected to a shaft (not shown) for rotating the rotor 1 inside the housing of a VSI-crusher.

The upper disc 2 has a central opening 8 through which material to be crushed can be fed into the rotor 1. The upper disc 2 is protected from wear by upper wear plates 10 and 12. The upper disc 2 is protected from rocks impacting the rotor 1 from above by the top wear plate 3. As is better shown in fig 2 the lower disc 4 is protected from wear by three lower wear plates 14, 16 and 18.

The upper and lower discs 2, 4 are separated by and held together by a vertical rotor wall which is separated into three wall segments 20, 22 and 24. The gaps between the wall segments 20, 22, 24 define outflow openings 26, 28, 30 through which material may be ejected against a housing wall.

At each outflow opening 26, 28, 30 the respective wall segment 20, 22, 24 is protected from wear by three

wear tips 32, 34, 36 located at the trailing edge of the respective wall segment 20, 22, 24.

A distributor plate 38 is fastened to the centre of the lower disc 4. The distributor plate 38 distributes the material that is fed via the opening 8 in the upper disc 2 and protects the lower disc 4 from wear and impact damages caused by the material fed via the opening 8.

During operation of the rotor 1 a bed 40 of material is built up inside the rotor 1 against each of the three wall segments 20, 22, 24. In fig 3 only the bed 40 located adjacent to the wall segment 20 is shown. The bed 40, which consists of material that has been fed to the rotor 1 and then has been trapped inside it, extends from a rear support plate 42 to the wear tips 32, 34, 36. The bed 40 protects the wall segment 20 and the wear tips 32, 34, 36 from wear and provides a proper direction to the ejected material. The dashed arrow A describes a typical passage of a piece of rock fed to the rotor 1 via the central opening 8 and ejected via the outflow opening 26. The arrow R indicates the rotational direction of the rotor 1 during operation of the VSI-crusher.

Each wall segment 20, 22, 24 is provided with a cavity wear plate 44, 46, 48, each consisting of three cavity wear plate portions. The cavity wear plates 44, 46, 48 protects the rotor 1 and in particular the wear tips 32, 34, 36 from material rebounding from the housing wall and from ejected material and airborne fine dust spinning around the rotor 1.

In Fig 4 a vertical shaft impact crusher 50 is shown. The rotor 1 is located inside a housing 52 of the crusher 50. At the top of the crusher 50 a feed hopper means 54 is located. The feed hopper means 54 has a hexagonal inner hopper 56 and a hexagonal outer hopper 58. A roof, not shown in fig 4, seals a space 60 formed between the inner hopper 56 and the outer hopper 58 from above. The inner hopper 56 is provided with six outlets 62, each outlet 62 being located at a side of the

hexagonal inner hopper 56. Each outlet 62 is provided with a movable hatch 64. The movable hatch 64 may be placed in three different positions on the inner hopper 56 to obtain a desired open area of the respective outlet 62. An "L"-shaped direction arm 66 is fixed between the inner hopper 56 and the outer hopper 58 adjacent to each outlet 62. Below the inner hopper 56 a central feeding cylinder 68 is placed. The feeding cylinder 68 is fixed to the inside of the wall 70 of the housing 52 with the aid of three beams of which only the beam 72 is shown in fig 4.

A circumferential distributing wall section 74 is located at the same level as the feeding cylinder 68. Below the distributing wall segment 74 and on the same level as the rotor 1 a circumferential impact wall section 76 is located. A cavity ring 78 separates the distributing wall segment 74 from the impact wall section 76. A number of vertical collection plates 80 which extend radially with respect to the rotor 1 are fixed to the upper surface 82 of the ring 78.

A bed retention ring 84 is located at the bottom of the crusher 50. A number of bed support plates 86 are located between the bed retention ring 84 and the cavity ring 78. A throttle means 88, partly shown in fig 4, is located between the inner hopper 56 and the feeding cylinder 68.

Fig 5 shows that the throttle means 88 controls a sliding throttle 90 located at the bottom 92 of the inner hopper 56. Material to be crushed is fed to the inner hopper 56 in the direction of the arrow M. The roof 94 prevents material from falling directly into the space 60 between the inner hopper 56 and the outer hopper 58. The roof 94 also prevents dust from flowing out of the top of the crusher 50. The opening position of the sliding throttle 90 determines the amount of material forming a first flow of material M1 that will reach the rotor 1 via an inlet 96 at the bottom 92 of the inner hopper 56 and

the feeding cylinder 68 in relation to the amount of material forming a second flow of material M2 that will reach the space 60 via the outlets 62.

Fig 6 shows how the rotor 1, being rotated with the aid of a not shown shaft connected to the hub 6, will accelerate the first flow of material M1 against the impact wall section 76. Quite soon after the crusher operation has been started some crushed material will accumulate against the impact wall section 76 to form a wall bed 98 of retained material as shown in fig 6. The bed support plates 86, the bed retention ring 84 and the cavity ring 78 will support the bed and provide a desired shape. The first flow of material M1 will be accelerated by the rotor 1 and impact against the wall bed 98 of retained material. Thus a so called autogenous crushing is obtained wherein the first flow of material M1 is crushed against a wall bed 98 formed from part of the material previously crushed.

Fig 7 shows, as seen from above, the sliding throttle 90 and the inlet 96 at the bottom 92 of the inner hopper 56. An inspection hatch 100 makes it possible to inspect the rotor 1 and perform maintenance inside the crusher 50. In fig 7 the roof 94 has been partially removed to visualize an advantageous effect of the polygonal hoppers 56, 58. Between two adjacent direction arms 66 a dead pocket 101 of accumulated material has been built up during crusher operation. The dead pocket 101, being formed between the polygonal hoppers 56 and 58, protects the direction arm 66, the roof 94 and the hoppers 56, 58 against wear caused by the second flow of material M2.

The operation of the crusher 50 will now be described in more detail with reference to Fig 8 to 10. As described with reference to fig 5 the feed of material M is divided in a first flow of material M1 and a second flow of material M2. The second flow of material M2 passes out of the outlets 62 and lands on the direction

arms 66. Each direction arm 66 has, as is best shown in fig 10, a vertical leg 102 and a horizontal leg 104. At an end of the horizontal leg 104 a projection 106 has been welded. The second flow of material M2 will

5 initially build a hillside 108 of material on the direction arm 66. Once the hillside 108 is in place, after few minutes of crusher operation, the second flow of material M2 will slide on the hillside 108 thus obtaining a movement having a substantially tangential

10 component in relation to the rotor 1, as can be seen from fig 8 and fig 9. The second flow of material M2 will thus in this first step be directed towards the distributing wall section 74. At the location of the distributing wall section 74 where the second material flow would impinge

15 the wall section 74 the collection plate 80 is located. During the first minutes of crusher operation the second flow of material M2 will build a second hillside 110 of material against the collection plate 80 and the upper surface 82 of the cavity ring 78 as is best shown in fig

20 8. After the second hillside 110 has been established the rest of the second flow of material M2 will, in a second step, slide on the second hillside 110. The second material flow M2 will thus, in this second step, obtain a movement having a substantially tangential component in

25 relation to the rotor 1. The second material flow M2 will then pass on down into a position adjacent to the impact wall section 76. Adjacent to the impact wall section 76 the second flow of material M2 having a movement with a substantially tangential component will be hit by the

30 first flow of material M1 ejected by the rotor. When the second flow of material M2 is hit by the first flow of material M1 it will be forced against the wall bed 98. Since the second flow of material M2 is fed adjacent to the impact wall section 76 the second flow of material M2

35 will land on the wall bed 98 either directly or after being hit by the first flow of material M1 and be exposed to the impact of the first flow of material M1 for a long

period of time thus achieving an efficient crushing. It
 will be appreciated that, as clearly demonstrated in fig
 6, any part of the second flow of material M2 that by
 accident is not immediately hit by the first flow of
 5 material M1 will also land on the wall bed 98 thus
 getting more chances of being hit by the first flow of
 material M1. This effect is enhanced by the fact that the
 second flow of material M2 is given a tangential
 component of movement by the second hillside 110 and is
 10 thus directed against the wall bed 98. Thus any part of
 the second flow of material M2 that is not hit by the
 first flow of material M1 (as illustrated in fig 9) will
 instead directly impact the wall bed 98 and be retained
 there for some time. The increased retention time of the
 15 second material flow M2 on the wall bed 98 is
 particularly important since the first flow of material
 M1 will appear to be pulsed when leaving the rotor 1.
 Since the rotor 1 is rotated and the first flow of
 material M1 is ejected through the three outflow openings
 20 26, 28, 30 of the rotor 1, a given portion of the wall
 bed 98 will become hit by the first flow of material M1
 three times per each revolution of the rotor 1, i.e. if
 the rotor rpm is 1500, a given portion of the wall bed 98
 will become hit $3 \times 1500 = 4500$ times per minute. The
 25 increased retention time of the second flow of material
 M2 on the wall bed 98 ensures that the second flow of
 material M2 will become hit by the first flow of material
 M1 before leaving the crusher. In fact the second flow of
 material M2 will be hit many times by the first flow of
 30 material M1 thus ensuring an efficient crushing. Fig 8
 further shows that the internal beam 72 has such a
 location in relation to the collection plate 80 that the
 beam 72 is not hit by the second flow of material M2.

As is indicated with a dashed arrow in fig 9 the
 35 movement of the first flow of material M1 will have a
 substantially tangential component. Since the second flow
 of material M2 has a movement with a substantially

tangential component having the opposite direction, the first flow of material M1 will impact the second flow of material M2 in a head-on collision thus further improving the crushing action. The fact that the first and second
5 flows of material M1, M2 travel in opposite directions before impacting each other provides an optimum initial impact energy.

From fig 10 another important aspect of the direction arm 66 is shown. The rotation of the rotor 1
10 will cause entrainment of dust particles. The particles will swirl along the rotational direction, shown with a dashed arrow R in fig 10, of the rotor 1 and move up and down in the crusher 50. The vertical leg 102 of the direction arm 66 and the horizontal leg 104 pointing in
15 the direction of the rotational direction R will however deflect the dust particles and force them down into the crusher 50, as indicated with an arrow D in fig 10. Thus the dust emissions from the crusher 50 will be substantially reduced thanks to the direction arm 66. The
20 dead pocket 101 built up against the vertical leg 102 improves the deflection of the dust particles and also protects the vertical leg 102, the roof 94, the inner hopper 56 and the outer hopper 58 (not shown in fig 10) from wear. The polygonal shapes of the inner hopper 56
25 and the outer hopper 58 will tend to diffuse the air rotating inside the crusher. The polygonal shape thus assists in decreasing the dust emission from the crusher.

It will be appreciated from fig 9 that a minor part of the second flow of material M2 sliding on the
30 hillside 108 may not reach the distributing wall section 74 and the second hill 110. This minor part of the second flow of material M2 will, however, also have a movement with a substantially tangential component and will be directed directly towards the impact wall section 76
35 where it is hit by the first flow of material M1.

It will be appreciated that numerous modifications of the embodiments described above are possible within the scope of the appended claims.

In an alternative embodiment of the invention only
5 the hillside 108 is used. In such an embodiment the hillside 108 formed on the direction arm 66 directs the second flow of material M2 directly towards the impact wall section 76 without going via the distributing wall section, which may be omitted in this alternative
10 embodiment. The second flow of material M2 thus having a movement with a substantially tangential component will reach the path of the first flow of material M1 adjacent to the impact wall section 76 and be subjected to multiple hits by the first flow of material M1 at the
15 wall bed 98 just like in the embodiment described above.

In still another embodiment of the invention only the hillside 110 is used. In such an embodiment the second flow of material M2 is dropped vertically on the upper surface 82 of the cavity ring 78. A collection
20 plate 80 located on the surface 82 will provide a basis for the accumulation of a hillside 110. The second flow of material M2 falling vertically on the hillside 110 will slide on the hillside 110 thus obtaining a movement having a substantially tangential component in relation
25 to the rotor 1. The second flow of material M2 will then enter the impact wall section 76 and be crushed in accordance with what has been described above.

The inner and outer hopper may in alternative
embodiments have other polygonal shapes such as square,
30 pentagonal etc. The inner and outer hoppers may also be circular. The polygonal shape is preferable since it makes the manufacturing of the outlets and in particular the hatches much easier since they can be made flat. The polygonal shape also reduces the wear on the hopper and
35 the dust emission from the crusher.

In an alternative embodiment the horizontal leg 104 of the direction arm 66 may have a length which is

adjustable. Thus the length of the horizontal leg could
be adjusted to accommodate different feed material types
and sizes. The length of the horizontal leg could also be
adjusted to optimise the reduction of dust emission from
5 the crusher.

7
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
22

CLAIMS

1. A vertical shaft impact crusher for crushing
5 material, said crusher (50) comprising
a rotor (1) for accelerating a first flow of
material (M1) to be crushed,
a first feed means (56, 90, 96) for vertically
feeding the first flow of material (M1) to the rotor (1),
10 a housing (52) comprising a wall (70) with a
circumferential impact wall section (76) against which
the accelerated first flow of material (M1) may be
crushed,
a second feed means (54, 56, 62, 58, 66, 80, 74, 78,
15 82) for feeding a second flow of material (M2) to be
crushed into the path of the accelerated first flow of
material (M1), c h a r a c t e r i s e d in that
the second feed means (54, 56, 62, 58, 66, 80, 74,
78, 82) is adapted to direct the second flow of material
20 (M2) in a direction having a substantially tangential
component in relation to the rotor (1), such that the
second flow of material (M2) will have a substantially
tangential component of movement in relation to the rotor
(1) when reaching the path of the first flow of material
25 (M1).
2. A crusher according to claim 1, wherein the
second feed means comprises a circumferential
distributing wall section (74) of the inner side of the
wall (70) of the housing (52), the distributing wall
30 section (74) being located above said impact wall section
(76), the second feed means further comprising a feed
hopper means (54) for feeding, in a first step, the
second flow of material (M2) in a direction towards the
distributing wall section (74).
- 35 3. A crusher according to claim 2, wherein the feed
hopper means (54) comprises an inner hopper (56) and an
outer hopper (58) surrounding the inner hopper (56), said

hoppers (56, 58) having a common vertical axis substantially coinciding with the vertical axis of the rotor (1), the inner hopper (56) being provided with at least one outlet (62) for allowing the second flow of material (M2) fed to the inner hopper (56) to enter a space (60) formed between the inner and the outer hopper (56, 58), an "L"-shaped direction arm (66) being fixed in the space (60) between said hoppers (56, 58) just outside said outlet (62) to facilitate the building of a hillside (108) of accumulated material, the hillside (108) having a slope being tangential in relation to the rotor (1) for directing the second flow of material (M2) towards the distributing wall section (74).

4. A crusher according to claim 3, wherein a horizontal leg (104) of the "L"-shaped direction arm (66) is pointing in the rotational direction (R) of the rotor (1), such that any dust (D) entrained by the rotor (1) in a direction having an upwardly directed component and a component being tangential in relation to the rotor (1) will be hindered by a vertical leg (102) of the direction arm (66).

5. A crusher according to claim 3 or 4, wherein the inner and outer hoppers (56, 58) have a polygonal shape as seen from above.

6. A crusher according to any one of claims 2-5, wherein the second feed means further comprises the upper surface (82) of a ring (78) fixed to the inner side of the wall (70) of said housing (52) to separate the distributor wall section (74) from the impact wall section (76).

7. A crusher according to claim 6, wherein the second feed means further comprises at least one vertical collection plate (80) extending radially with respect to the rotor (1), the collection plate (80) being fixed to the upper face (82) of the ring (78) at such a location that a part of the second flow of material (M2) fed towards the distributing wall section (74) in said first

step will accumulate against the collection plate (80) to form a hillside (110) of material, the hillside (110) having a slope being substantially tangential in relation to the rotor (1) for giving, in a second step, the
5 remaining part of the second flow of material (M2) a substantially tangential component of movement in relation to the rotor (1) when reaching the path of the first flow of material (M1).

8. A method of crushing material, said method
10 comprising the steps of
feeding a first flow of material (M1) to be crushed to a rotor (1) rotating around a vertical axis,
in said rotor (1) accelerating said first flow of material towards an impact wall section (76) of a housing
15 (52) surrounding the rotor (1),
feeding a second flow of material (M2) to be crushed into the path of the accelerated first flow of material (M1),

c h a r a c t e r i s e d i n
20 feeding the second flow of material (M2) in a direction having a substantially tangential component in relation to the rotor (1), such that the second flow of material (M2) will have a substantially tangential component of movement in relation to the rotor (1) when
25 reaching the path of the first flow of material (M1).

9. A method according to claim 8, wherein the second flow of material (M2) is fed into the path of the first flow of material (M1) adjacent to the impact wall section (76).

30 10. A method according to claim 8 or 9, wherein the second flow of material (M2) is fed from a position adjacent to the axis of the rotor (1) towards a wall (70) of the housing (52) in a direction having a substantial tangential component in relation to the rotor (1).

35

ABSTRACT

5 A method of crushing material comprises the steps of
feeding a first flow of material (M1) to be crushed to a
rotor (1) rotating around a vertical axis, in said rotor
(1) accelerating said first flow of material towards an
impact wall section (76), and feeding a second flow of
10 material (M2) to be crushed into the path of the
accelerated first flow of material (M1).

The second flow of material (M2) is fed in a
direction having a substantially tangential component in
relation to the rotor (1), such that the second flow of
material (M2) will have a substantially tangential
15 component of movement in relation to the rotor (1) when
reaching the path of the first flow of material (M1).

A crusher is adapted to feed the second flow of
material (M2) such that it will have a substantially
tangential component of movement in relation to the rotor
20 (1) when reaching the path of the first flow of material
(M1).

25

30

35

Elected for publication: Fig 8

1/6

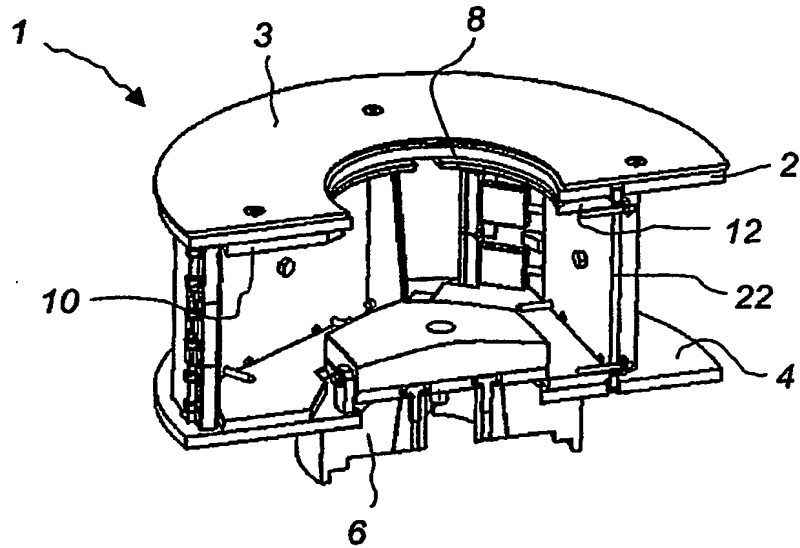


Fig. 1

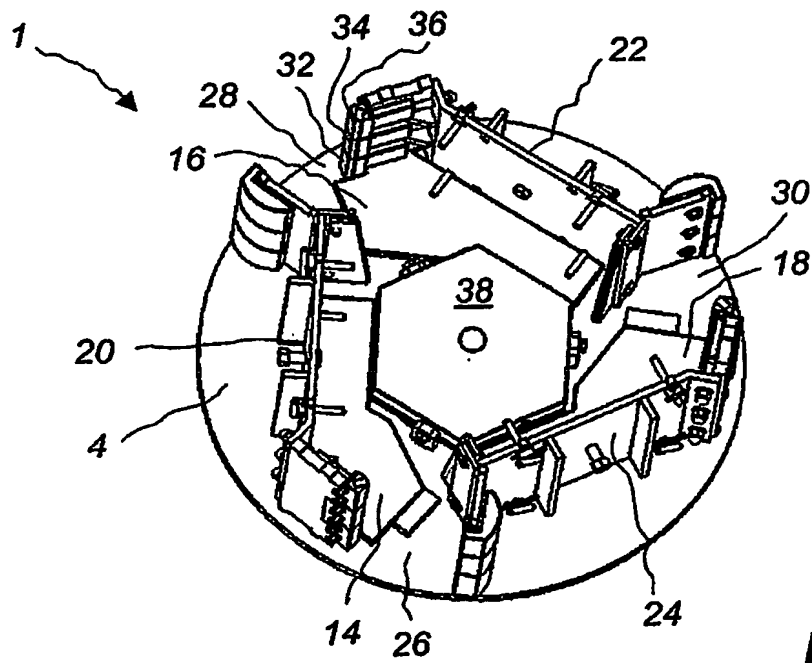


Fig. 2

2/6

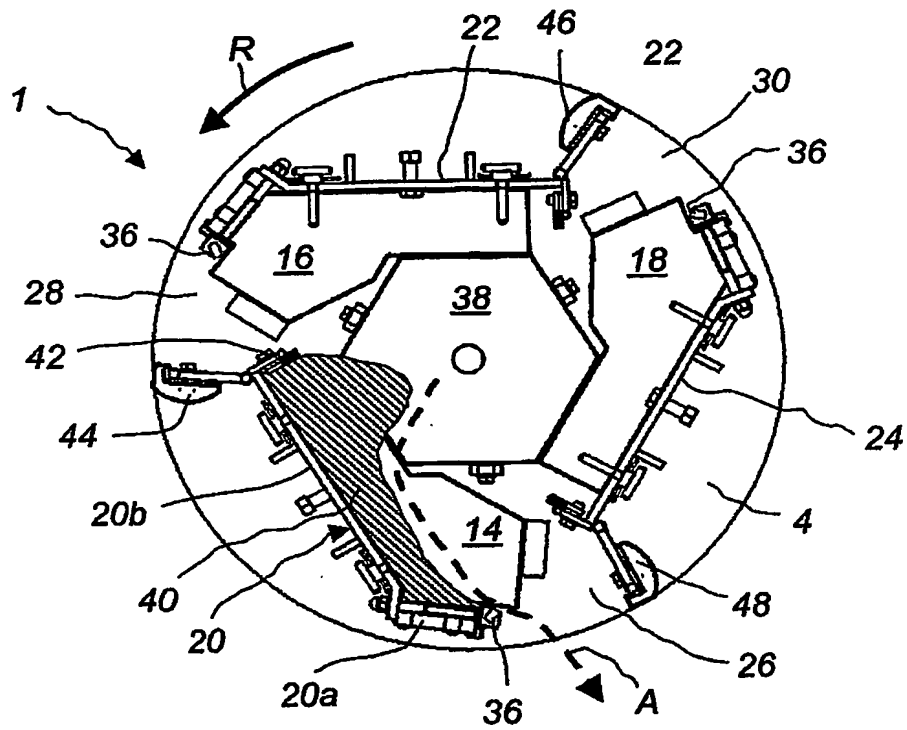


Fig. 3

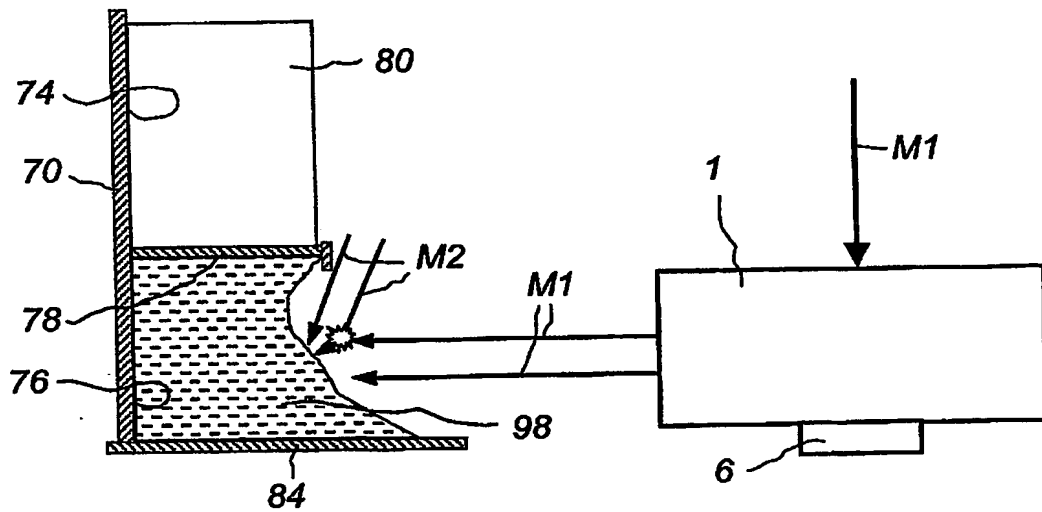


Fig. 6

3/6

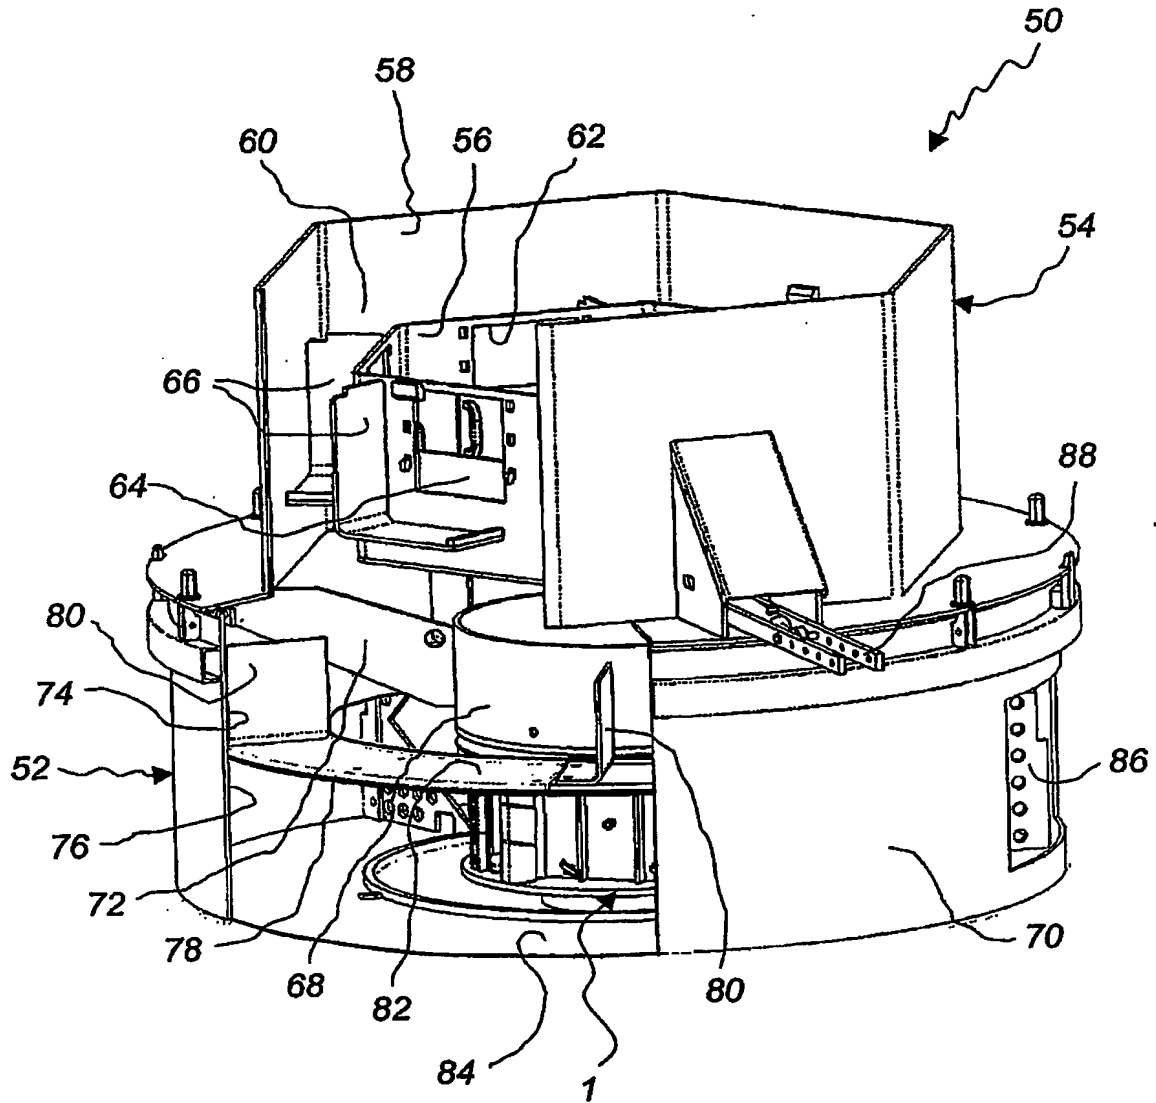


Fig. 4

4/6

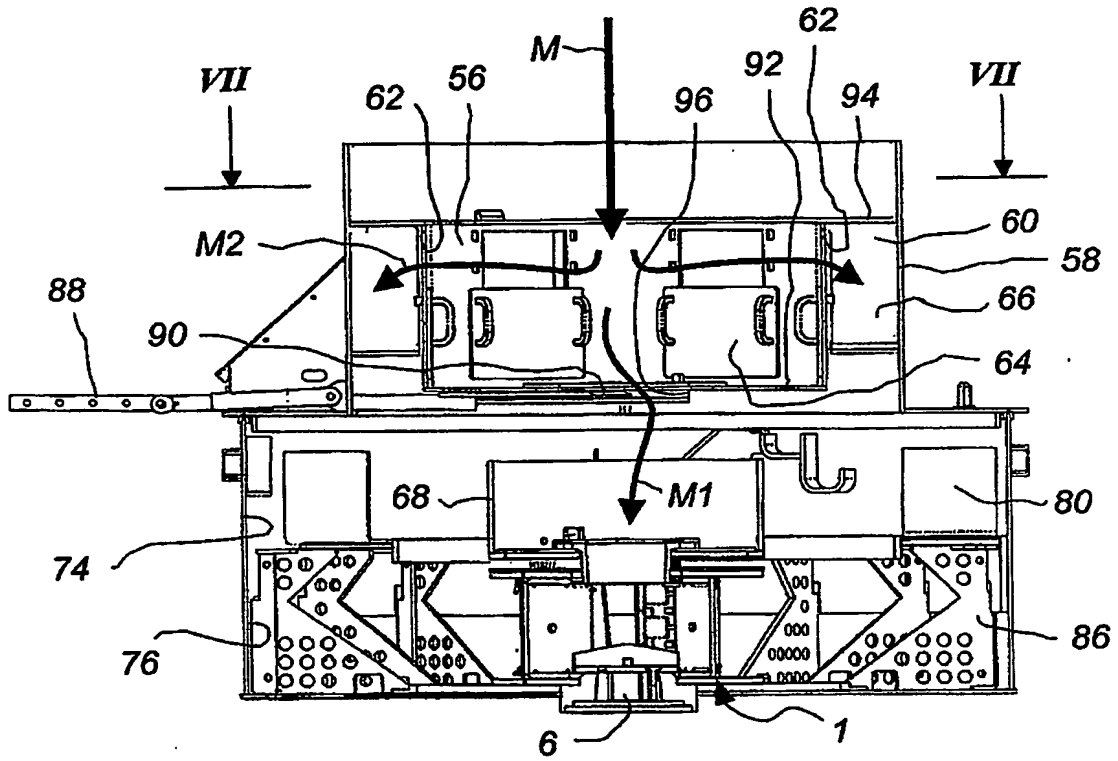


Fig. 5

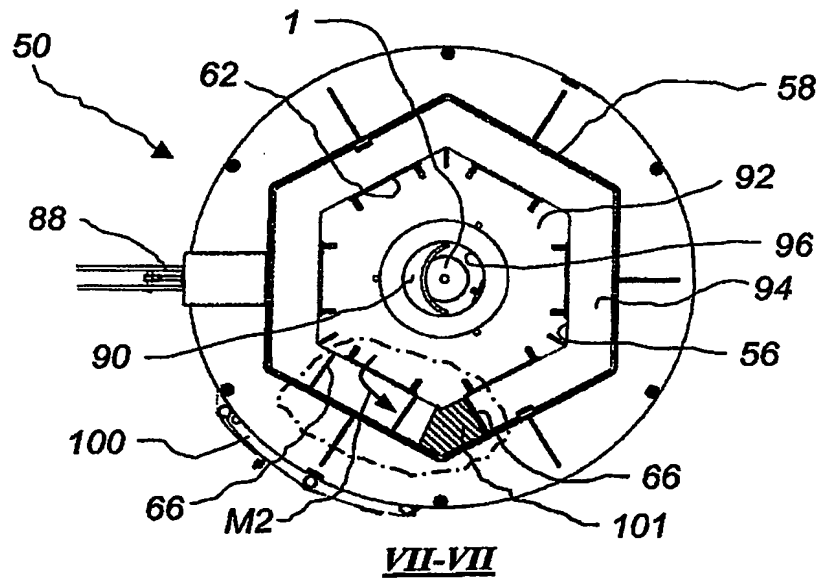


Fig. 7

5/6

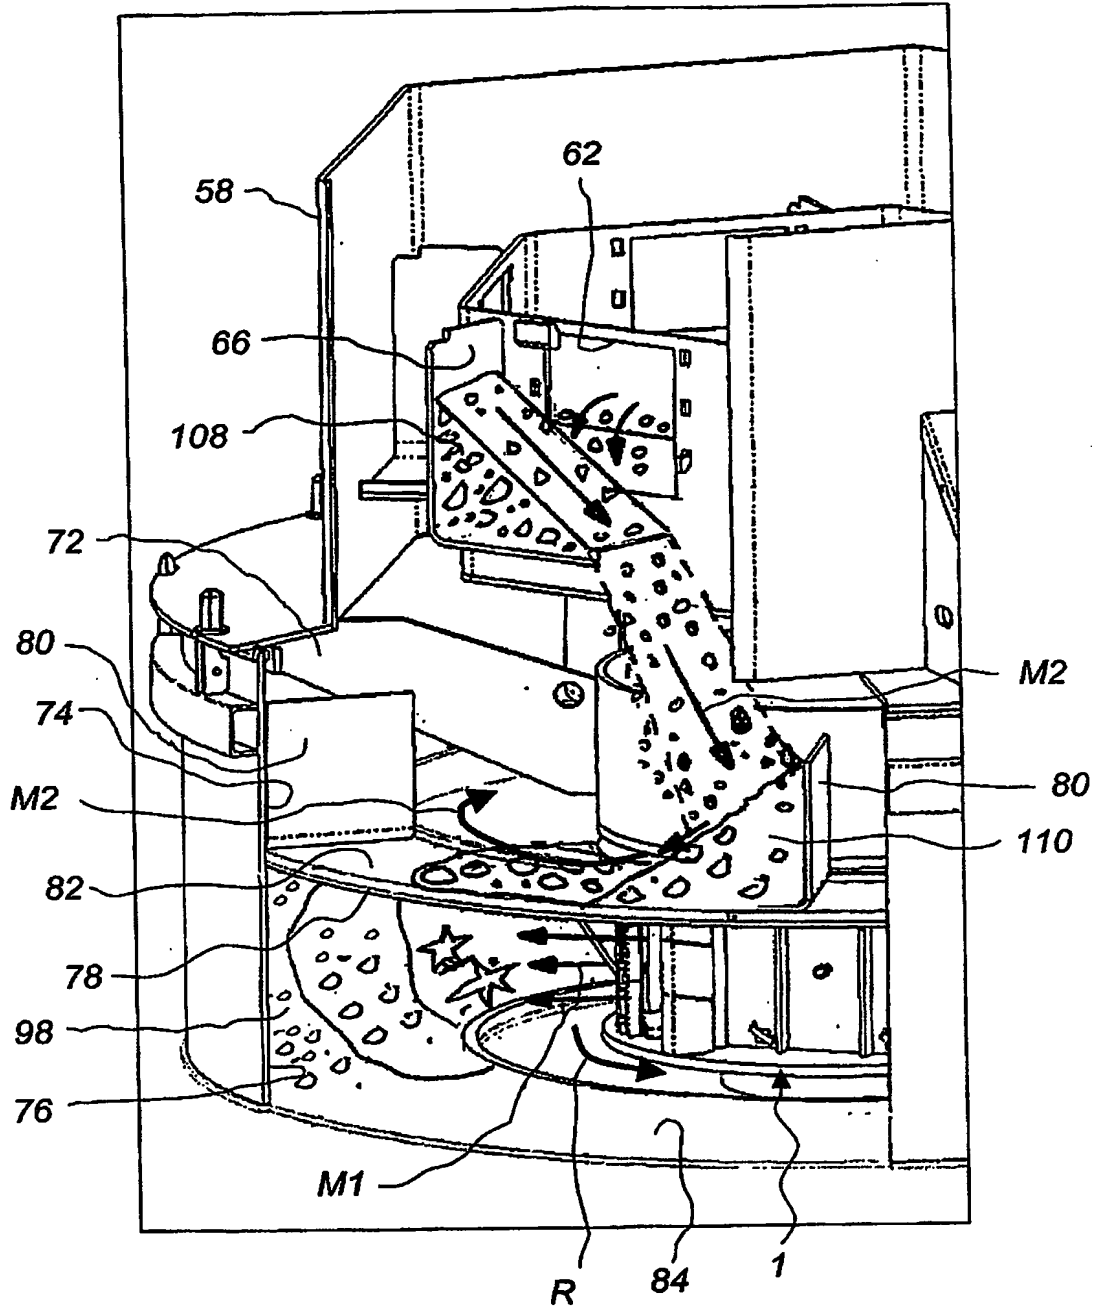


Fig. 8

6/6

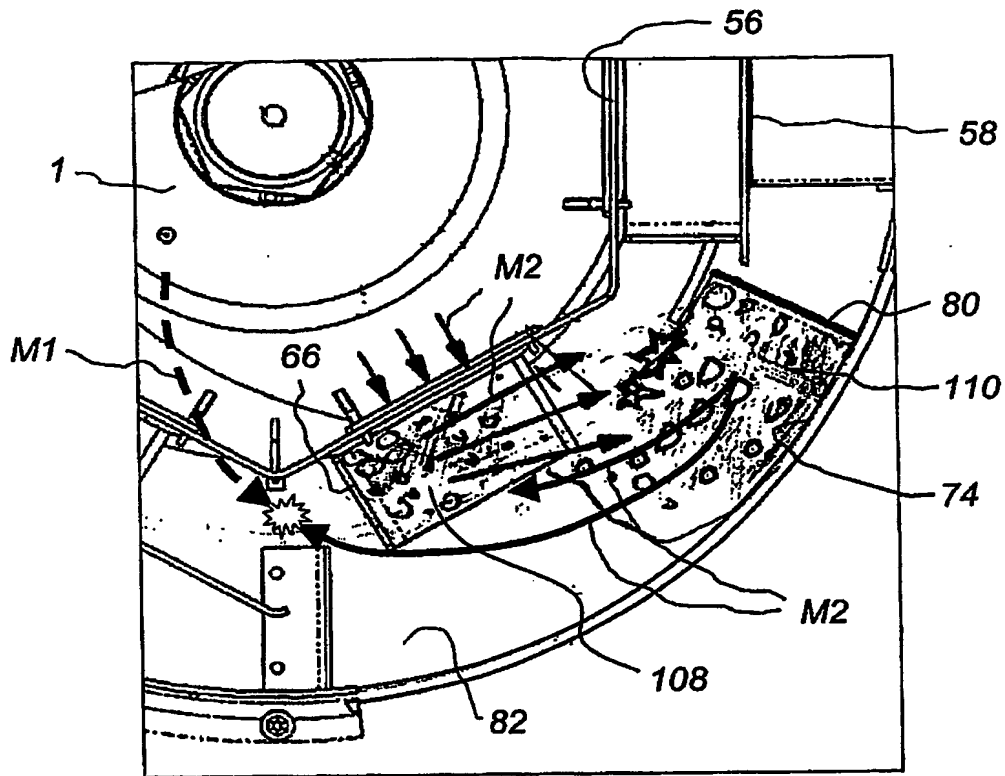


Fig. 9

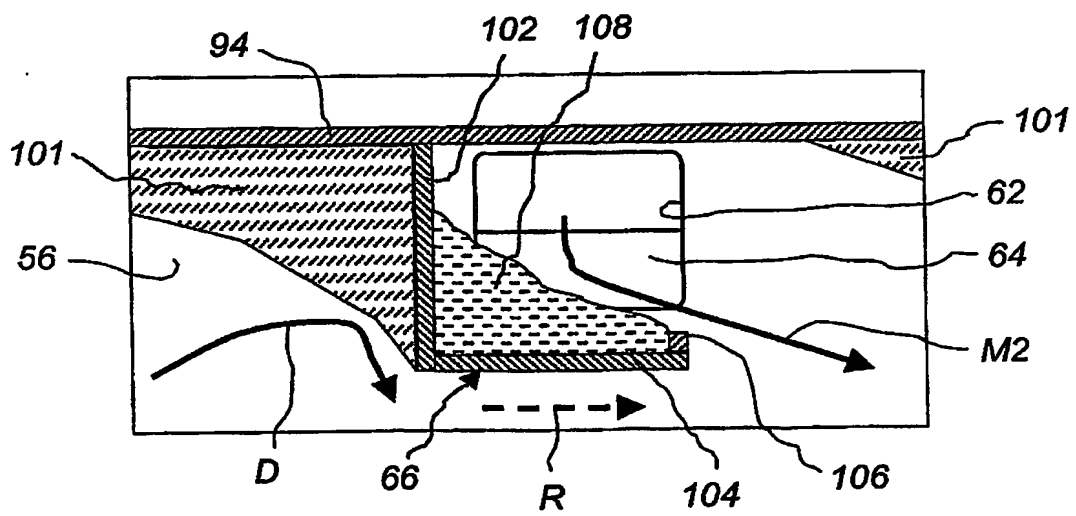


Fig. 10

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.